

koyo

motorcycle batteries



Import available:  **MOTUS**



TYPE	ALTERNATIVE	VOLT	AH	DIMENSIONS			TERMINALS
				L	W	H	
KTZ5S	YTZ5S	12	4,5	114	71	86	- _ _ _ +
KTZ7S	YTZ7S	12	6	113	70	105	- _ _ _ +
KTZ7S-BS		12	6	113	70	105	- _ _ _ +
KT7B-4	KT7B-BS	12	6,5	150	65	93	+ _ _ _ -
KT7B-BS	KT7B-4/YT7B-4	12	6,5	150	65	93	+ _ _ _ -
KT9B-4	YT9B-4	12	8	150	70	150	+ _ _ _ -
KT9B-BS	KT9B-4/YT9B-4	12	8	150	70	105	+ _ _ _ -
KTZ10S	YTZ10S	12	8,6	150	87	93	+ _ _ _ -
KTZ10S-BS	KTZ10S/YTZ10S	12	8,6	150	87	93	+ _ _ _ -
KTZ12S	YTZ12S	12	11	150	87	110	+ _ _ _ -
KTZ12S-BS	KTZ12S/YTZ12S	12	11	150	87	110	+ _ _ _ -
KT12A-BS		12	10	150	70	105	+ _ _ _ -
KT12B-4	YT12B-4	12	10	150	87	130	+ _ _ _ -
KT12B-BS	KT12B-4/YT12B	12	10	150	70	130	+ _ _ _ -
KTZ14S	YTZ14S	12	11,2	150	87	110	+ _ _ _ -
KTZ14S-BS	KTZ14S/YTZ14S	12	11,2	150	70	110	+ _ _ _ -
KT14B-4	YT14B-4	12	12	150	70	145	+ _ _ _ -
KT14B-BS	KT14B-4/YT14B	12	12	150	87	145	+ _ _ _ -
KTZ19S	51913	12	19	181	76	167	- _ _ _ +

• CLOSED TYPE

TYPE	ALTERNATIVE	VOLT	AH	DIMENSIONS			TERMINALS
				L	W	H	
YTX4L-BS		12	3	114	71	86	- +
YTX5L-BS		12	4	114	71	106	- +
YTX7L-BS		12	6	114	71	131	- +
YTX7A-BS		12	6	150	87	94	+ -
YTX9-BS		12	8	150	87	105	+ -
YTX12-BS		12	10	150	87	130	+ -
YTX14-BS		12	12	150	87	145	+ -
YTX16-BS		12	14	150	87	161	+ -
YTX20L-BS		12	18	175	87	155	- +
YTX20CH-BS	CBTX20A-BS	12	18	150	87	161	+ -



• DRY CHARGE

TYPE	ALTERNATIVE	VOLT	AH	DIMENSIONS			TERMINALS
				L	W	H	
6N4-2A		6	4	71	71	96	
B38-6A		6	14	119	83	161	
YB3L-B		12	3	98	56	110	
YB4L-B		12	4	120	70	92	
12N5-3B	CB5L-B	12	5	120	60	130	
YB5L-B	12N5-3B	12	5	120	60	130	
YB6L-B		12	6	137	71	96	
YB7-A	12N7-4B	12	8	135	75	133	
YB7L-B	12N7-3B	12	8	135	75	133	
12N9-4B-1	CB9-B	12	9	135	75	139	
12N10-3B	CB10L-B	12	10	135	90	145	
12N12A-3A		12	12	200	75	133	
12N12A-4A-1	CB12A-A	12	12	134	80	160	
YB12AL-A2		12	12	134	80	160	
YB14L-B2		12	14	134	89	166	
YB16CL-B		12	19	175	100	175	
YB16L-B		12	19	175	100	155	
YB16AL-A2		12	16	207	71	164	

Terminal

- ▶ Prevents electrolyte leakage.
- ▶ Reduce corrosion.
- ▶ Extends life battery.

Safety Cap level


- ▶ Prevents electrolyte leakage and ▶ permits use- placing in any position-filt.

Negative plate

Durable calcium plates lead with ▶ resistance vibration to a minimum handling and ▶ long life.

Positive plate

Durable calcium plates lead with ▶ resistance vibration to a minimum handling and ▶ long life.

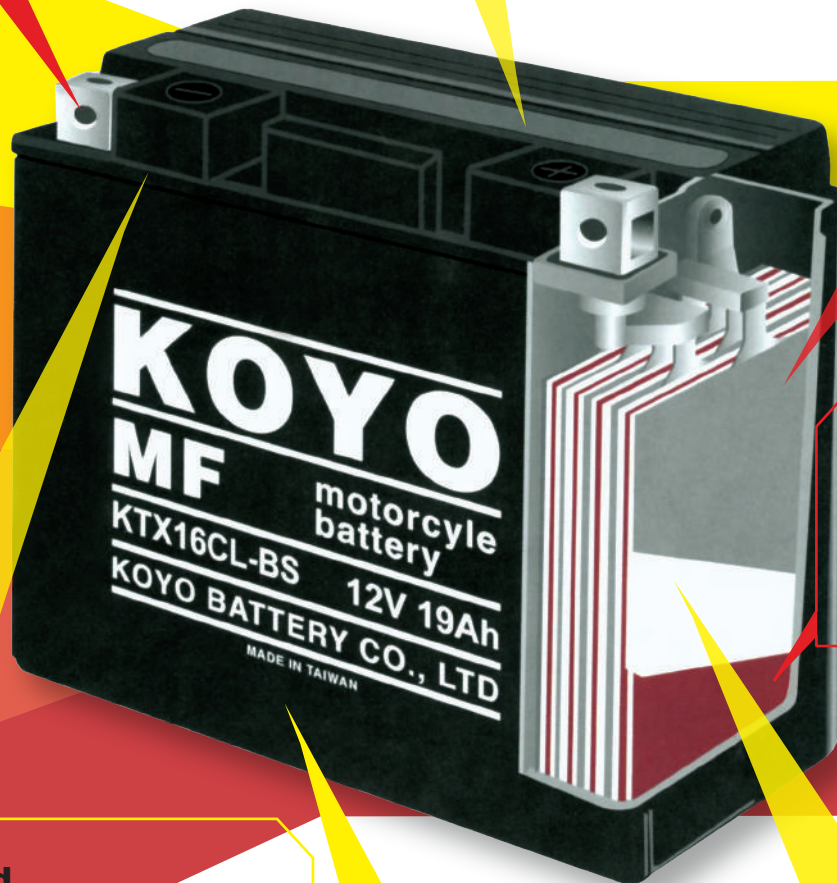

Heat-sealed lid

- ▶ Minimize electrolyte leakage
- ▶ and improves performance reliability.

Cover and shell Polypropylene

- ▶ Ensures proper amount of electrolyte for operation at lower temperatures.
- ▶ Resistant to the effects of extreme weather conditions.

Separator

- ▶ Protects the plates from the acid and
- ▶ ensures long life.

koyo
MADE IN TAIWAN

 **MOTUS**

Exclusive disposal: **MOTUS** // Dimokratias St. 35, Kamatero
T. 210 23.86.905 // F. 210 23.86.926 // www.e-motus.gr