


ELIX ULTRA X	TECHNICAL DATASHEET	Created:	9.12.2023
		Modified:	5.3.2024
TYPE	B24		
CODE	U-54540		

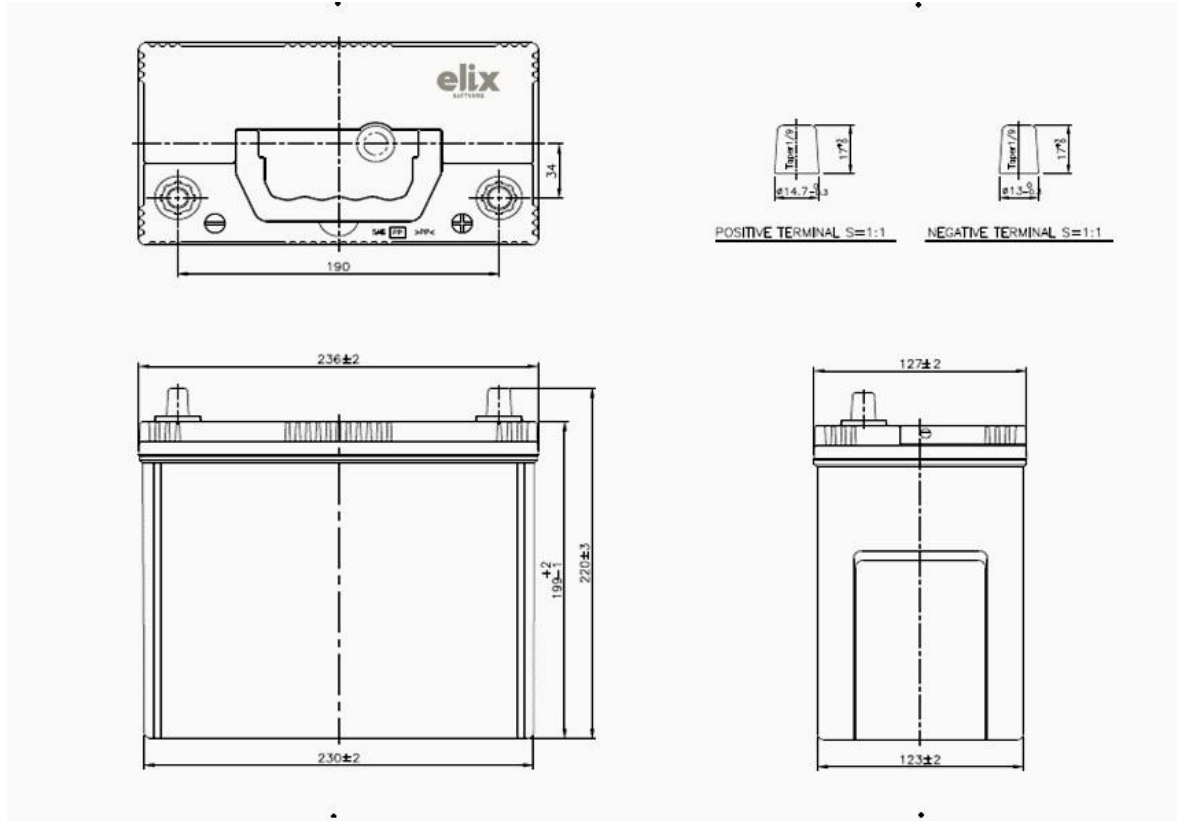

PERFORMANCES

Voltage (V):	12
C20(Ah):	45
Cold Cranking Ampere (A):	430 CCA
Charge Acceptance (A):	4,5
Plates per Cell (pcs):	12
Pos./ Grid Alloy:	Exp. / Pb-Ca-Sn
Neg./ Grid Alloy:	Exp. / Pb-Ca
Separator:	PE(Enveloped)

WEIGHT & DIMENSIONS (max.)

Battery Weight (kg):	11,5 (+/-2%) with acid
Lead Weight (kg):	6,00 base on ingot
Length (mm):	238
Width (mm):	129
Height (mm):	201
Total Height (mm) :	223

CONTAINER

Type:	B24 Acc. To JIS
Hold Down:	No
H.D.Adapter:	No

COVER

Type:	Double Lid
Polarity:	(-,+) Cell layout
Terminal Adapter:	No
Magic Eye:	Yes 1 Ball
Degassing system	Short side
Flame Arrestor	Yes 2pcs(filter)

PLUGS

Type:	No Vent Sealed
-------	----------------

HANDLE

Type:	Yes
-------	-----

OTHERS

Degassing Tube:	No
-----------------	----