





ELIX ULTRA X	TECHNICAL DATASHEET	Created:	9.12.2023
		Modified:	5.3.2024
TYPE	L3		
CODE	U-57520		



POSITIVE TERMINAL S=1:1

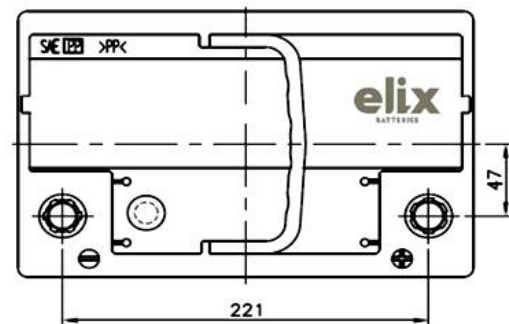

NEGATIVE TERMINAL S=1:1

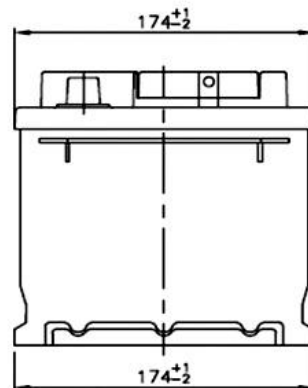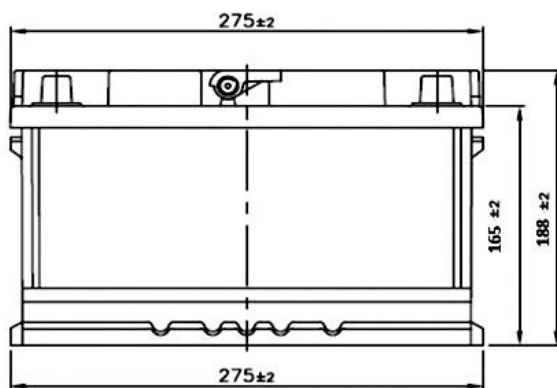

PERFORMANCES

Voltage (V):	12
C20(Ah):	75
Cold Cranking Ampere (A):	620 SAE
Charge Acceptance (A):	7,0
Plates per Cell (pcs):	14
Pos./ Grid Alloy:	Exp. / Pb-Ca-Sn
Neg./ Grid Alloy:	Exp. / Pb-Ca
Separator:	PE(Enveloped)

WEIGHT & DIMENSIONS (max.)

Battery Weight (kg):	16,5 (+/-2%) with acid
Lead Weight (kg):	10,059
Length (mm):	277
Width (mm):	175
Height (mm):	190
Total Height (mm) :	190

CONTAINER

Type:	L3 Acc. To DIN
Hold Down:	B3
H.D.Adapter:	No

COVER

Type:	Flat/Seald -
Polarity:	(-,+) Cell layout
Terminal Adapter:	No
Magic Eye:	Yes 1 Ball
Degassing system	Yes
Flame Arrestor	Yes

PLUGS

Type:	No Vent Sealed
-------	----------------

HANDLE

Type:	1x intergated -
-------	-----------------

OTHERS

Degassing Tube:	No
-----------------	----