

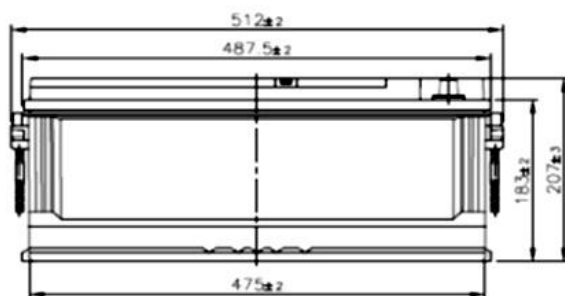


ELIX ULTRA X	TECHNICAL DATASHEET	Created:	9.12.2023
		Modified:	5.3.2024
TYPE	MAC		
CODE	U-63531		

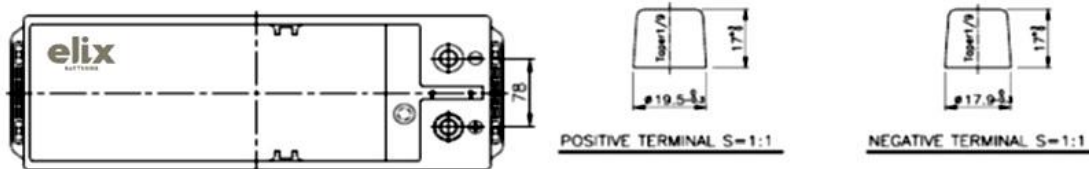

PERFORMANCES

Voltage (V):	12
C20(Ah):	135
Cold Cranking Ampere (A):	910 EN
Charge Acceptance (A):	14,0
Plates per Cell (pcs):	22
Pos./ Grid Alloy:	Exp. / Pb-Ca-Sn
Neg./ Grid Alloy:	Exp. / Pb-Ca
Separator:	PE(Enveloped)

WEIGHT & DIMENSIONS (max.)

Battery Weight (kg):	34,0(+/-2%) with acid
Lead Weight (kg):	18,16
Length (mm):	514
Width (mm):	175
Height (mm):	185
Total Height (mm) :	210

CONTAINER

Type:	MAC Acc. To DIN
Hold Down:	B3
H.D.Adapter:	No

COVER

Type:	Double Lid(FL)\
Polarity:	(+, -) Cell layout
Terminal Adapter:	No
Magic Eye:	Yes
Degassing system	Yes
Flame Arrestor	Yes 2pcs(filter)

PLUGS

Type:	No Vent Sealed
-------	----------------

HANDLE

Type:	Yes 2x Rope
-------	-------------

OTHERS

Degassing Tube:	No
-----------------	----