
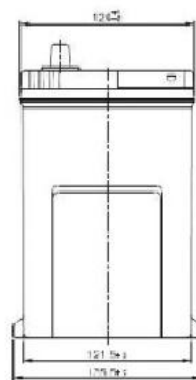
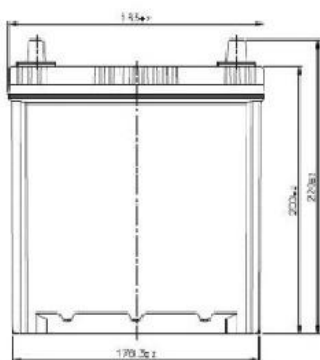
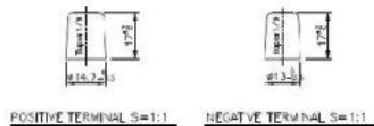


ELIX ULTRA X	TECHNICAL DATASHEET	Created:	9.12.2023
		Modified:	5.3.2024
TYPE	B19		
CODE	U-54048		



PERFORMANCES

Voltage (V):	12
C20(Ah):	40
Cold Cranking Ampere (A):	410 CA
Charge Acceptance (A):	3,0
Plates per Cell (pcs):	9
Pos./ Grid Alloy:	Exp. / Pb-Ca-Sn
Neg./ Grid Alloy:	Exp. / Pb-Ca
Separator:	PE(Enveloped)

WEIGHT & DIMENSIONS (max.)

Battery Weight (kg):	8,5 (+/-2%) with acid
Lead Weight (kg):	4,582
Length (mm):	187
Width (mm):	127
Height (mm):	202
Total Height (mm) :	223

CONTAINER

Type:	B19 Acc. To JIS
Hold Down:	B1
H.D.Adapter:	No

COVER

Type:	Flat/Seald
Polarity:	(-,+) Cell layout
Terminal Adapter:	No
Magic Eye:	Yes
Degassing system	Yes
Flame Arrestor	Yes

PLUGS

Type:	No Vent Sealed
-------	----------------

HANDLE

Type:	1x intergated
-------	---------------

OTHERS

Degassing Tube:	No
-----------------	----