



ELIX ULTRA X	TECHNICAL DATASHEET	Created:	9.12.2023
		Modified:	5.3.2024
TYPE	DIN A		
CODE	U-64021		

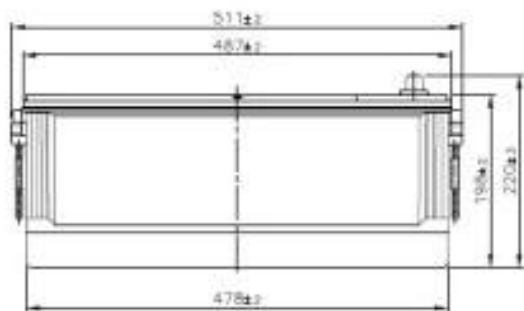

PERFORMANCES

Voltage (V):	12
C20(Ah):	140
Cold Cranking Ampere (A):	900 SAE
Charge Acceptance (A):	14,0
Plates per Cell (pcs):	23
Pos./ Grid Alloy:	Exp. / Pb-Ca-Sn
Neg./ Grid Alloy:	Exp. / Pb-Ca
Separator:	PE(Enveloped)

WEIGHT & DIMENSIONS (max.)

Battery Weight (kg):	34,8(+/-2%) with acid
Lead Weight (kg):	19,06
Length (mm):	513
Width (mm):	189
Height (mm):	200
Total Height (mm) :	223

CONTAINER

Type:	DIN A
Hold Down:	Bo
H.D.Adapter:	No

COVER

Type:	Flat/Seald -
Polarity:	(+, -) Cell layout
Terminal Adapter:	No
Magic Eye:	Yes
Degassing system	Yes
Flame Arrestor	Yes

PLUGS

Type:	No Vent Sealed
-------	----------------

HANDLE

Type:	Yes 2x Rope
-------	-------------

OTHERS

Degassing Tube:	No
-----------------	----