

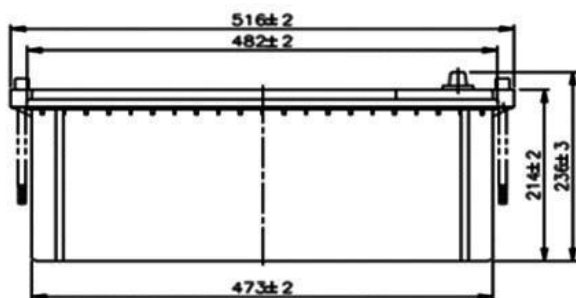



ELIX ULTRA X MARINE	TECHNICAL DATASHEET	Created:	31.01.2024
		Modified:	5.3.2024
TYPE	DIN C		
CODE	U-73021 MSHD		



PERFORMANCES

Voltage (V):	0
C20(Ah):	230
Cold Cranking Ampere (A):	1250 SAE
Charge Acceptance (A):	23
Plates per Cell (pcs):	30
Pos./ Grid Alloy:	Exp. / Pb-Ca-Sn
Neg./ Grid Alloy:	Exp. / Pb-Ca
Separator:	PE(Enveloped)

WEIGHT & DIMENSIONS (max.)

Battery Weight (kg):	54(+/-2%) with acid
Lead Weight (kg):	29,3
Length (mm):	518
Width (mm):	273
Height (mm):	216
Total Height (mm) :	241

CONTAINER

Type:	DIN C Acc. To DIN
Hold Down:	No
H.D.Adapter:	No

COVER

Type:	Double Lid(FL)\
Polarity:	(+,-) Cell layout
Terminal Adapter:	No
Magic Eye:	Yes
Degassing system	Yes
Flame Arrestor	Yes

PLUGS

Type:	No Vent Sealed
-------	----------------

HANDLE

Type:	Yes 2x Rope
-------	-------------

OTHERS

Degassing Tube:	No
-----------------	----