
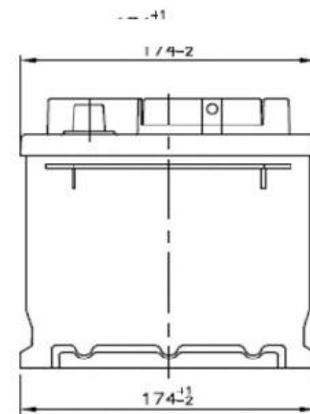


ELIX X	TECHNICAL DATASHEET	Created:	31.01.2024
		Modified:	5.3.2024
TYPE	LB3		
CODE	X-57010-S		

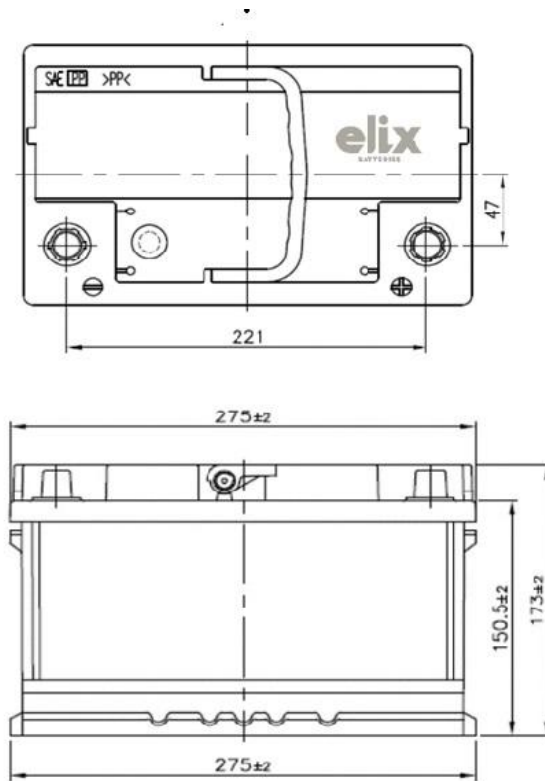

PERFORMANCES

Voltage (V):	0
C20(Ah):	70
Cold Cranking Ampere (A):	580 SAE
Charge Acceptance (A):	6,0
Plates per Cell (pcs):	15
Pos./ Grid Alloy:	Exp. / Pb-Ca-Sn
Neg./ Grid Alloy:	Exp. / Pb-Ca
Separator:	PE(Enveloped)

WEIGHT & DIMENSIONS (max.)

Battery Weight (kg):	15,5 (+/-2%) with acid
Lead Weight (kg):	8,944 base on ingot
Length (mm):	277
Width (mm):	175
Height (mm):	175
Total Height (mm) :	175

CONTAINER

Type:	LB3 Acc. To DIN
Hold Down:	Yes with adaptor
H.D.Adapter:	No

COVER

Type:	Flat/Seald -
Polarity:	(-,+) Cell layout
Terminal Adapter:	No
Magic Eye:	Yes 1 Ball
Degassing system	Yes Short side(CT)
Flame Arrestor	Yes 2pcs

PLUGS

Type:	No Vent Sealed
-------	----------------

HANDLE

Type:	1x intergated -
-------	-----------------

OTHERS

Degassing Tube:	No
-----------------	----