




ELIX AGM START&STOP	TECHNICAL DATASHEET	Created:	31.01.2024
		Modified:	5.3.2024
TYPE	L3		
CODE	AGM-57020-S		



α POSITIVE TERMINAL S=1:1

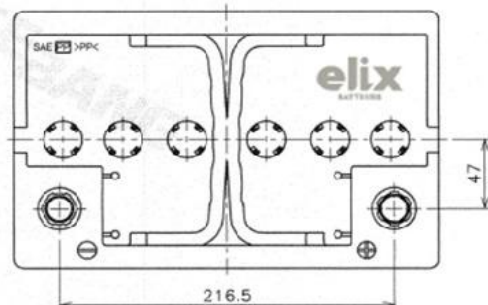

α NEGATIVE TERMINAL S=1:1

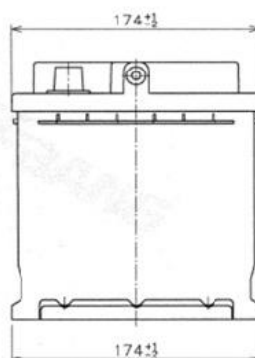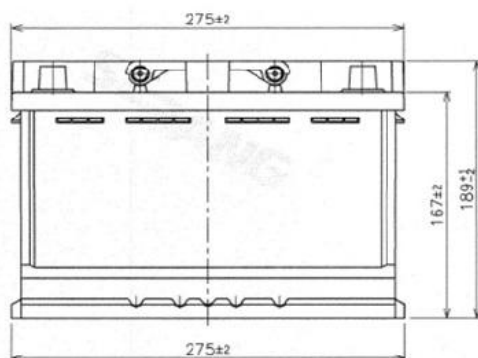

PERFORMANCES

Voltage (V):	0
C20(Ah):	70
Cold Cranking Ampere (A):	760 EN
Charge Acceptance (A):	17,5
Plates per Cell (pcs):	16
Pos./ Grid Alloy:	Expended / Pb-Ca-Sn
Neg./ Grid Alloy:	Expended / Pb-Ca-Sn
Separator:	AGM

WEIGHT & DIMENSIONS (max.)

Battery Weight (kg):	19,4(+/-2%) with acid
Lead Weight (kg):	14,15 base on ingot
Length (mm):	277
Width (mm):	175
Height (mm):	169
Total Height (mm) :	190

CONTAINER

Type:	L3 Acc. To EN
Hold Down:	Yes
H.D.Adapter:	No

COVER

Type:	Flat/sealed type -
Polarity:	(-,+) Cell layout
Terminal Adapter:	No
Magic Eye:	No 1 Ball
Degassing system	Short side
Flame Arrestor	Yes 2pcs(filter)

PLUGS

Type:	No Vent Sealed
-------	----------------

HANDLE

Type:	Yes -
-------	-------

OTHERS

Degassing Tube:	No
-----------------	----